


E1061/E1063


HUMAN MACHINE INTERFACES

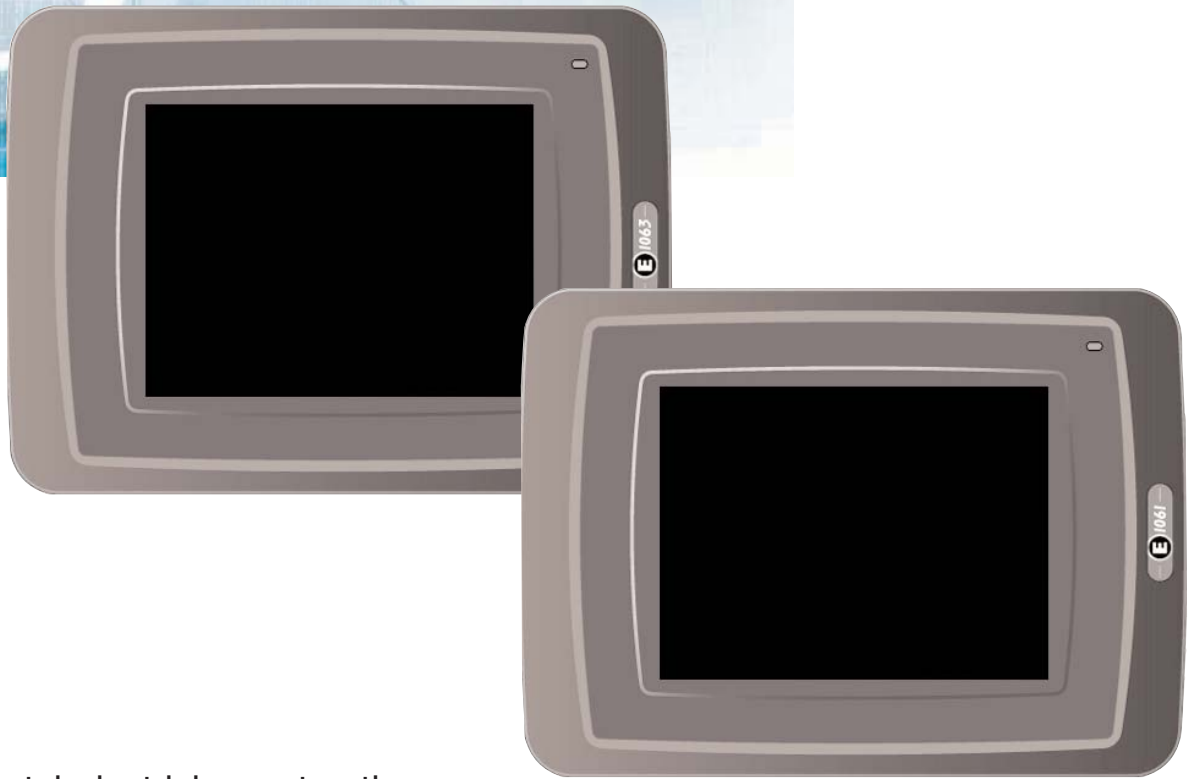

- Compact industrial construction
- Built-in and configurable serial ports (RS232/RS422/RS485*)
- Expansion option slots
- Real time clock
- Upgradeable terminal firmware and communication drivers
- Programmable function keys
- Programmable multicolored LEDs
- Removable text strips
- Ultra-thin display panel construction
- High resolution display technology
- Built-in 10/100MB Ethernet ports
- Universal Serial Bus (USB) ports (host support)

E1061/E1063 General Specifications

Model	E1061	E1063
Display Type	STN	
Display Size	5.7"	
Resolution/Pixels	QVGA 320 x 240	
Colors	65K	16 (Grayscale)
Input Type	Touch	
LED / Function Keys	20 / 22	
Alarm Function	7 – 11 groups	
FLASH Memory	12 MB	
Serial Ports	RS232 (9-pin DSUB), combined RS422/RS485 (25-pin DSUB)	
Ethernet	One 10/100 Mbit TP-port	
USB Host	One port for printer, keyboard, mouse, scanner. . .	
Memory Cards	Not available	
Real-Time Clock	Battery backed	
Housing / Front Material	Cast aluminum	
Power Supply	±24 VDC (20 - 30 VDC)	
Dimensions mm (inch)	201 x 152 x 6 (7.9 x 6.0 x 0.2)	
Weight kg (lbs)	0.87 (1.9)	
Max. Current Draw Min. (Max.)	0.25A (0.45A)	
Ambient Temp V (H)	0 – 50°C (0 – 40°C)	

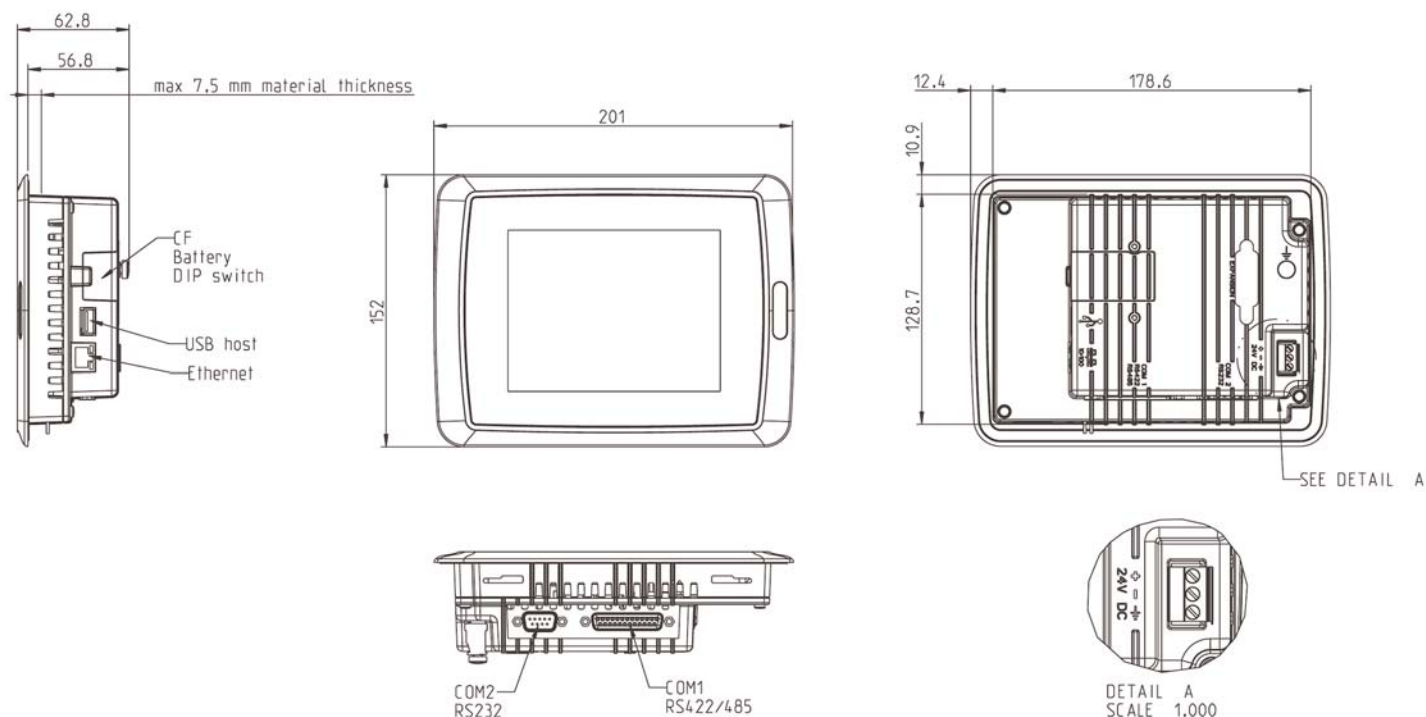

Mitsubishi Electric Automation, Inc.
500 Corporate Woods Parkway
Vernon Hills, IL 60061
Phn: (847) 478-2100
Fax: (847) 478-2253

Mitsubishi Electric Automation, Inc.
4299 14th Avenue
Markham, Ontario L3R 0J2
Phn: (905) 475-8989
Fax: (905) 475-7935

Visit us at www.meau.com

Effective October, 2006 • L-VH-06078
Specifications subject to change without notice.

Automation Platforms™ • Industrial Computers • Programmable Logic Controllers • Human Machine Interfaces • SCADA • Software
Servo Systems • Motion Control • Variable Frequency Drives • Computerized Numerical Controls • PC Based Control • Robots